

Support clamp for panels and electro-welded mesh

mounting of the panel without drilling

MATERIAL

Glass-fibre reinforced polyamide (PA) SUPER-technopolymer, matte finish, RAL 9005 (C9) black colour or RAL 7040 (C33) grey colour.

VIBRATION-DAMPING PADS

Made out of NBR rubber, hardness 90 Shore A, supplied assembled.

SCREW AND NUT

AISI 304 stainless steel countersunk head screw (UNI 5933) and M5 nut.

STANDARD EXECUTIONS

- **PPR**: for the mounting of panels, without vibration-damping elements.
- **PPR-A**: for the mounting of panels, with vibration-damping elements.
- **PPR-R**: for the mounting of electro-welded mesh type TEC® (max thread diameter 3 mm), without vibration-damping elements.

FEATURES AND APPLICATIONS



- Assembly on square-section profiles of 25 mm
- Panel drilling is not required for mounting.
- Rubber vibration-damping elements to ensure perfect locking of the panel even if not perfectly in tolerance or in the presence of strong vibrations.
- The distance of 7.5mm of the panel with respect to the profile avoids areas of dirt accumulation.
- Safety in compliance with ISO 13857, paragraph 4.2.4.
- The safety distance (D) is the minimum required distance between the protection structure and the potentially dangerous element of the machine (Fig.1).

ASSEMBLY OF THE CLAMP ON THE PROFILE

- Tighten the clamp against the profile and the panel or the electro-welded mesh using the screw and the nut included in the package.



ELESA Original design

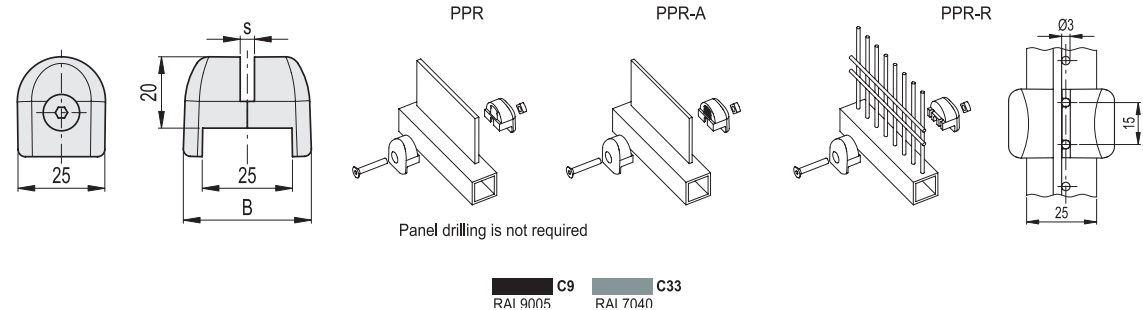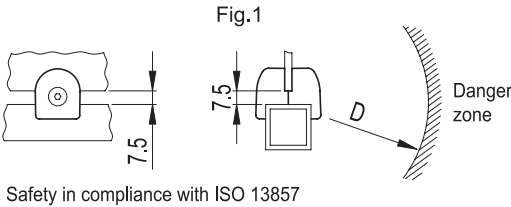

Panel drilling is not required

C9 RAI 9005 C33 RAI 7040

STAINLESS STEEL								
Code	Description	Code	Description	B	s* Panel thickness	si** Panel thickness	C# [Nm]	⚖
49354-C9	PPR-4-C9	49354-C33	PPR-4-C33	36	4	3/16	2.5	23
49355-C9	PPR-5-C9	49355-C33	PPR-5-C33	37	5	-	2.5	24
49356-C9	PPR-6-C9	49356-C33	PPR-6-C33	38	6	1/4	2.5	25
49363-C9	PPR-A-3-C9	49363-C33	PPR-A-3-C33	36	2.5÷3.4	2.9÷3.9	2.5	23
49364-C9	PPR-A-4-C9	49364-C33	PPR-A-4-C33	37	3.5÷4.4	4.0÷4.6	2.5	24
49365-C9	PPR-A-5-C9	49365-C33	PPR-A-5-C33	38	4.5÷5.4	4.7÷5.9	2.5	25
49375-C9	PPR-R-5-C9	49375-C33	PPR-R-5-C33	37	5	-	2.5	25
49376-C9	PPR-R-6-C9	49376-C33	PPR-R-6-C33	38	6	-	2.5	26

Maximum tightening torque for the screw. s* For square profiles of 25 mm si** For square profiles of 1"